



# High Pass Filter

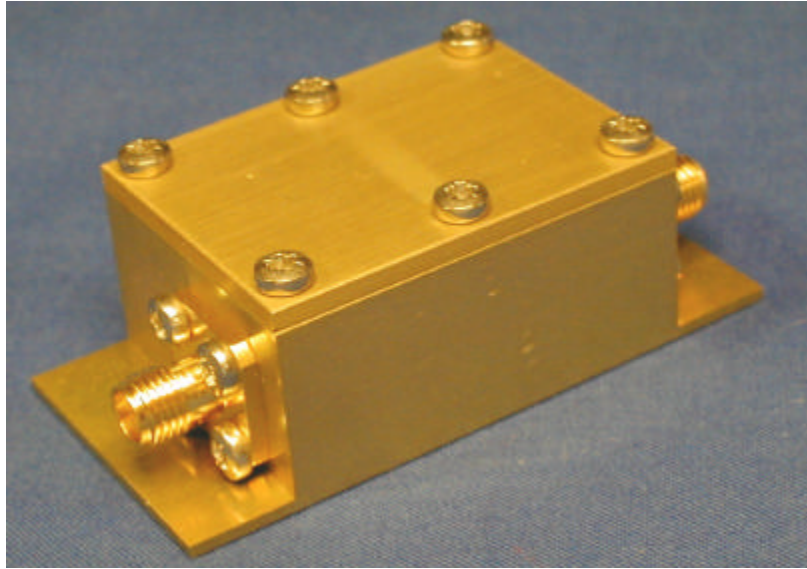

KHz to GHz

Low insertion loss

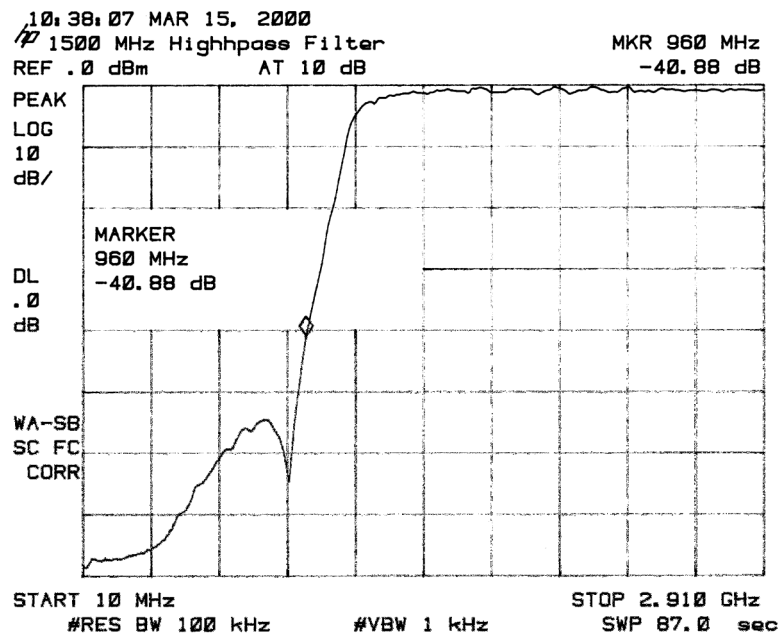

# SPECIFICATIONS

## For 1500 MHz High Pass Filter

Model No.:	1602-1500
Frequency pass:	1500 - 3000 MHz
Insertion loss total:	1.5 dB
Frequency reject:	0 – 960 MHz
Insert loss:	<-40dB
Power Rating:	10 Watts
SWR input/output (50 $\Omega$ ):	<1.5:1
Connectors:	-RF input/output SMA female
Dimensions:	-With: 30mm -Length: 60mm -Height: 22mm
Temperature	-Operating 0 to 60°C -Storage -20 to 90°C

21.10.2004

Comm-connect reserve the rights to amend prices and specifications without prior notice.

---

**COMM-connect**  
**Sigerslevoestervej 11**  
**DK-3600 Frederikssund**  
**Denmark**

**Phone: +45 48 28 82 82**

**Fax.: +45 48 28 82 66**

**E-Mail: [sales@comm-connect.com](mailto:sales@comm-connect.com)**

**WEB: <http://www.comm-connect.com>**

---

