



Low Pass Filter

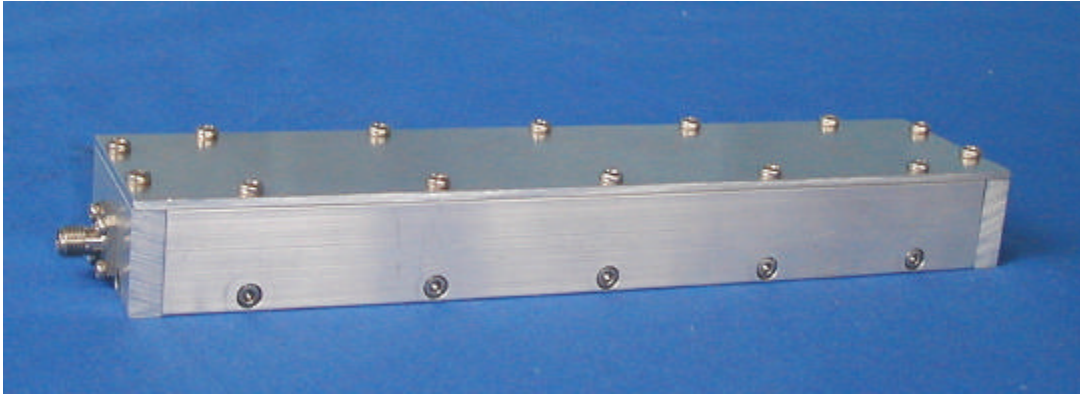

KHz to GHz

Low insertion loss

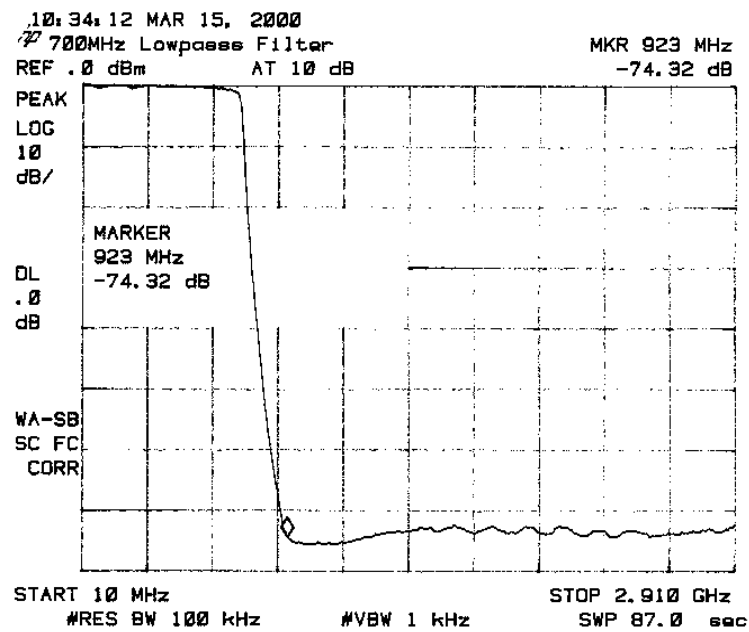

SPECIFICATIONS

For 700 MHz Low Pass Filter

Model No.:	1501-700
Frequency pass:	0 - 700 MHz
Insertion loss total:	0.5 dB
Frequency reject:	900 – 3000 MHz
Insert loss:	<-65dB
Power Rating:	100 Watts
SWR input/output (50 Ω):	<1.5:1
Connectors:	-RF input/output SMA
Dimensions:	-With: 43mm -Length: 207mm -Height: 25mm
Temperature	-Operating 0 to 60°C -Storage -20 to 90°C

21.10.2004

Comm-connect reserve the rights to amend prices and specifications without prior notice.

COMM-connect
Sigerslevoestervej 11
DK-3600 Frederikssund
Denmark

Phone: +45 48 28 82 82

Fax.: +45 48 28 82 66

E-Mail: sales@comm-connect.com

WEB: <http://www.comm-connect.com>

