


Band Pass Filter



400MHz to 2200MHz

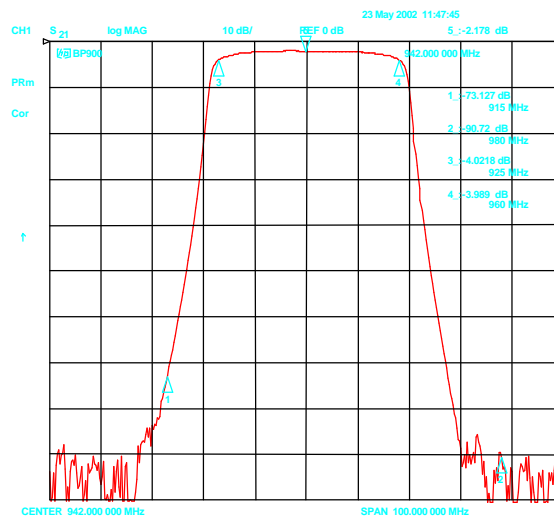

SPECIFICATIONS

For 900 MHz Band Pass Filter

Model No.:	1701-BP900
Number of resonators:	13
Frequency Pass:	925 – 960 MHz
Insertion loss total:	>5 dB
Frequency Reject:	0 – 915 MHz <-70dB
Frequency Reject:	980 - 1600MHz <-85dB
Power Rating:	10 Watts
Return loss pass band (50 Ω):	>12dB
Connectors:	-RF input/output SMA
Dimensions:	-With: 35mm -Length: 375mm -Height: 90mm
Temperature	-Operating 0 to 60°C -Storage -20 to 90°C

21.10.2004

These Band Pass filters can be from 3 to 15 resonators in the frequency range from 400MHz to 2200MHz depending on application, please specify your requirements.

Comm-connect reserve the rights to amend prices and specifications without prior notice.

COMM-connect
Sigerslevoestervej 11
DK-3600 Frederikssund
Denmark

Phone: +45 48 28 82 82

E-mail: sales@comm-connect.com

Fax.: +45 48 28 82 66

WEB: <http://www.comm-connect.com>



