


HIGH PERFORMANCE ACTIVE ANTENNA

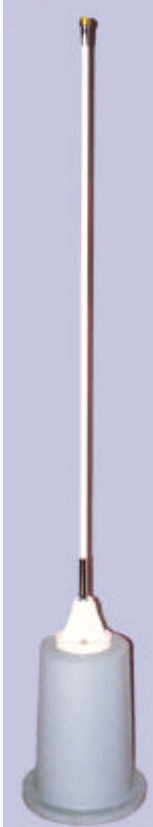

Selective Receiving Antenna

High dynamic range

Covering 100 KHz trough 30MHz

**Over the Coax power and
control**


Control unit universal interface

EMC Protected

Rugged Marine Design



COMM - connect

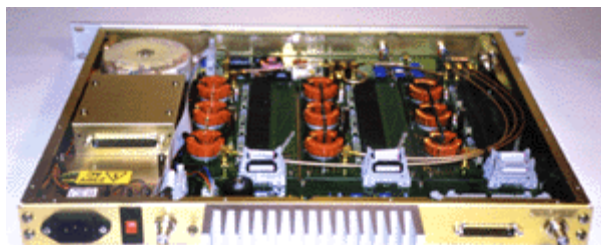

SPECIFICATIONS

High Performance Indoor Controller unit

Model	Type 4050L
Frequency range:	100 KHz to 30 MHz
Interface to receiver	BCD coded frequency sequence
Tuning control for Outdoor unit:	Serial data via coax
Burnout protection:	10 Volt pp diode clamp
Lightning protection:	90Volt
SWR in 50 Ω :	<2:1
SWR out 50 Ω :	<2:1
Connector:	"N" female
Power supply:	115/230Vac @ max 100VA
Outdoor unit supply:	+26Volt DC 1A via coax cable
Colour	Silver/Aludine
Mechanical:	1Unit 19" Rack 425X400mm
Weight	5 kg
Temperature	-Operating -Storage
	-30 to +85°C -40 to +85°C
EMC	Complies with directive 89/336EEC and amendment 92/31EEC
Standards	Emissions: EN55011 Immunity: EN 50082-1

21.10.2004

Comm-connect reserve the rights to amend prices and specifications without prior notice.

COMM-connect
Sigerslevoestervej 11
DK-3600 Frederikssund
Denmark

Phone: +45 48 28 82 82

Fax.: +45 48 28 82 66

E-mail: sales@comm-connect.com

WEB: <http://www.comm-connect.com>

