


Minimum Loss Pad

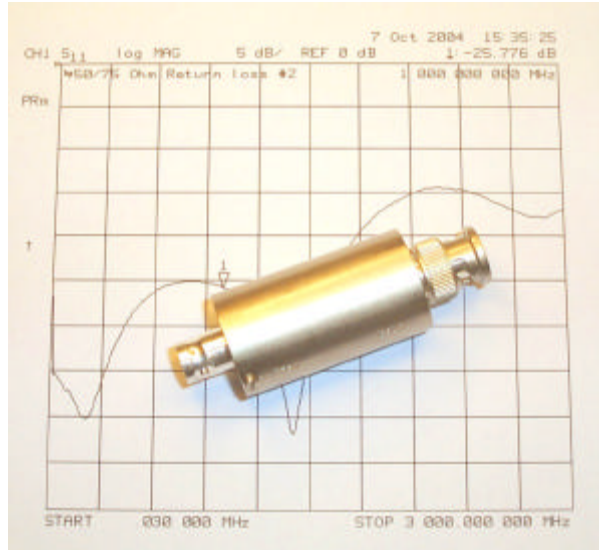

50 ? to 75 ?
Covering DC to 3GHz

SPECIFICATIONS

Model No.:	8006
Frequency range:	DC – 3 GHz
Insertion loss total:	5.71 dB \pm 0.5dB
Power Rating:	500 mW
VSWR 50 Ω side DC – 1GHz:	<1.2:1
VSWR 50 Ω side 1GHz – 3GHz:	<1.5:1
Connectors:	-RF input/output BNC male 50?, BNC female 75?
Dimensions:	-Width: 25mm -Length: 72mm
Temperature	-Operating 0 to 60°C -Storage -20 to 90°C

21.10.2004

Comm-connect reserve the rights to amend prices and specifications without prior notice.

COMM-connect
Sigerslevoestervej 11
DK-3600 Frederikssund
Denmark

Phone: +45 48 28 82 82

Fax.: +45 48 28 82 66

E-Mail: sales@comm-connect.com

WEB: <http://www.comm-connect.com>

